


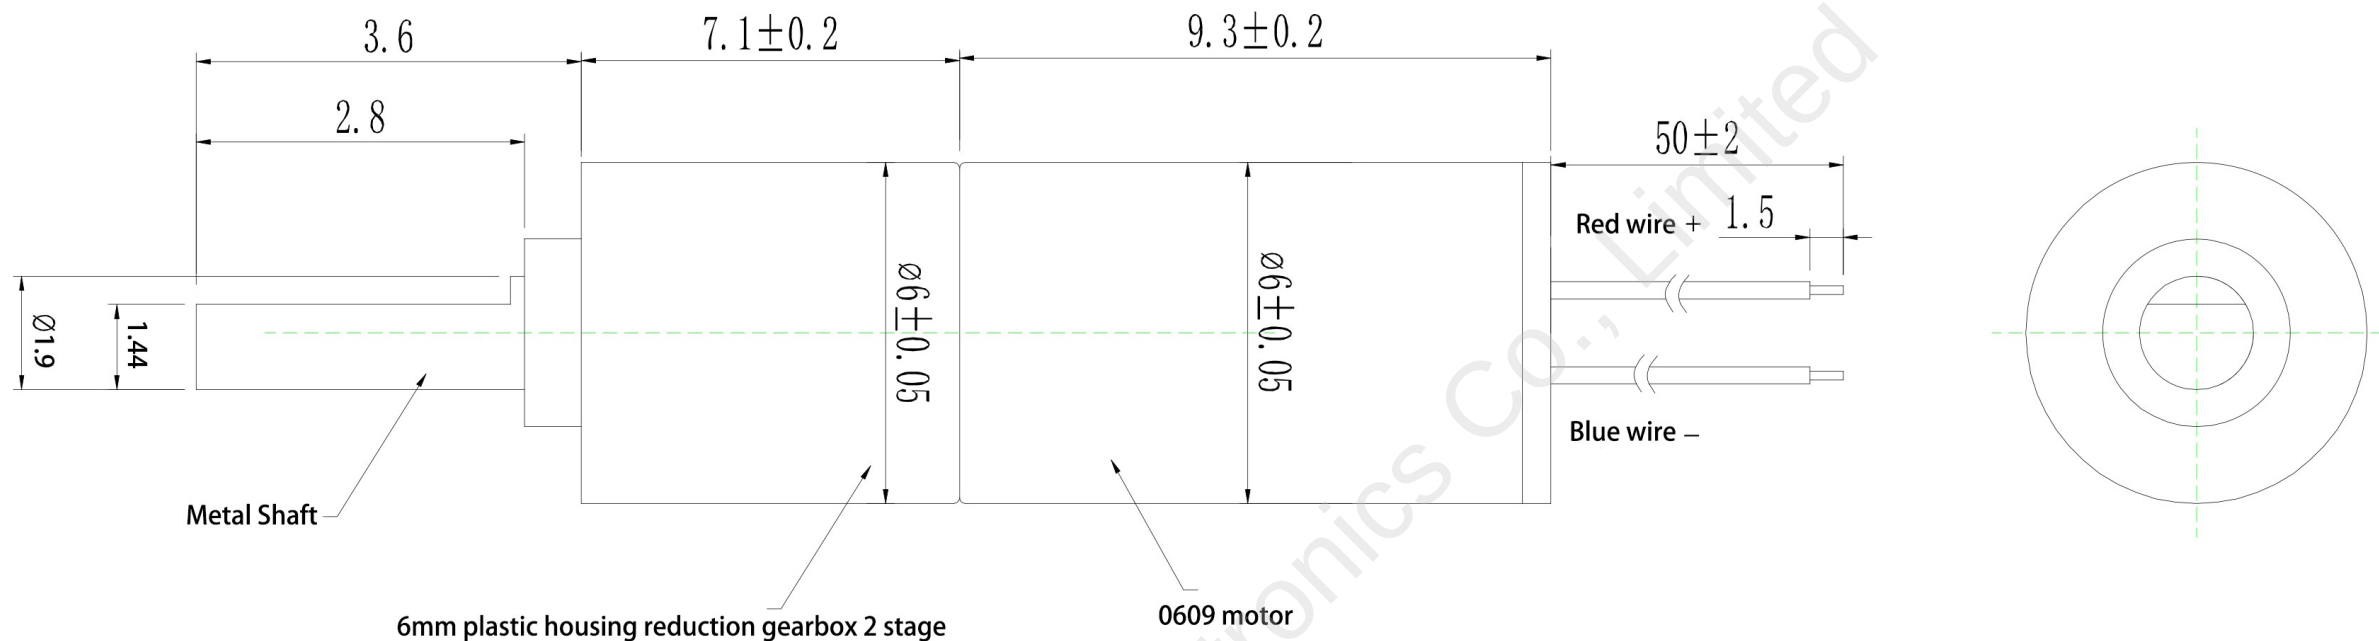

Performance Requirements

1. Rated Voltage: 3.0V
2. No-load Current: 50mA max
3. No-load Speed: 1170 ± 10% rpm
4. Starting Voltage: 1.5V max no-load
5. Stall Current: 230mA max
6. Stall Torque: 22.8g • cm approx

Unit: mm

Tolerance				CONFIRMED & ACCEPTED BY CUSTOMER <i>Company, Chop & Signature</i> Outline Drawing		MODEL NO : NFP-609-26-0675-MS	DES 'D	
Basic Size	Value	Angle	Value			S/O:	CHK 'D	
0~6	± 0.1	0~10	± 15 '				REV 'D	
6~30	± 0.2	10~50	± 30 '				APP 'D	
30~120	± 0.3	50~120	± 1°				SCALE	1 : 1
>120	± 0.5	>120	± 1° 30 '			Need For Power Electronics		