


额定电压 Rated Voltage	3.0V DC
使用环境范围 Operating Condition Tempertature Range	-20~+50℃
空载转速 Noload speed	6400±15% rpm
空载电流 Noload Current	≤30 mA
负载转矩 Rated Torque	1.2 g. cm
负载转速 Rated Speed	4600±10% rpm
负载电流 Rated Current	60 mA
堵转电流 Stall Current	230 mA
堵转力矩 Stall Torque	4.5 g. cm
旋向 Direction	CW/CCW
噪音 Noise	≤45 dB
轴向间隙 Axial gap	0.3MAX

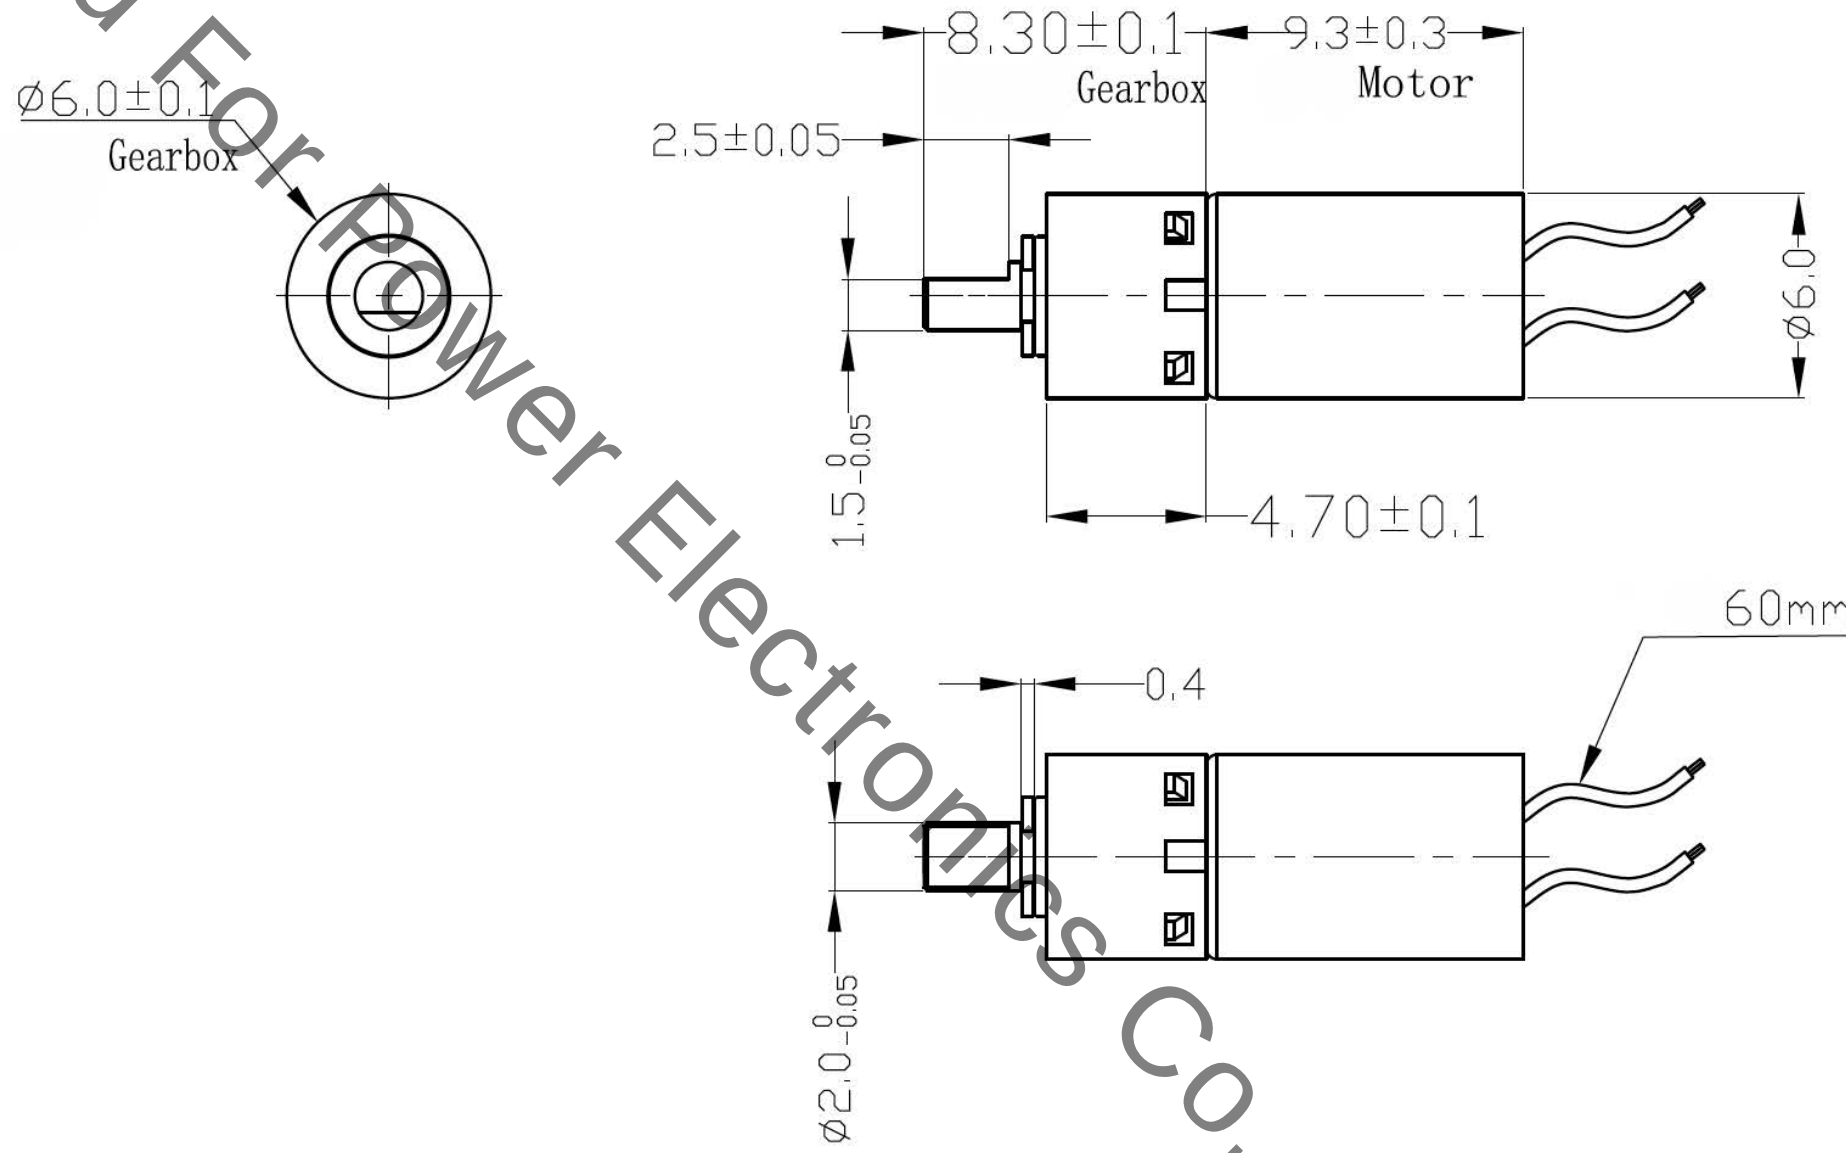

Tolerance				CONFIRMED & ACCEPTED BY CUSTOMER Company, Chop & Signature Outline Drawing	MODEL NO : NFP-609-5.14-0675		DES'D	
Basic Size	Value	Angle	Value		S/O:		CHK'D	
0~6	±0.1	0~10	±15'		Need For Power Electronics		REV'D	
6~30	±0.2	10~50	±30'				APP'D	
30~120	±0.3	50~120	±1°				SCALE	1 : 1
>120	±0.5	>120	±1° 30'				 	