



Model No. NFP-RS-775DHV

1. Application

This article regulates the relevant technical requirements of model NFP-RS-775DHV vibration motor.

- Adult Supplies, Massage Chairs, Vibrating Sticks, Multifunctional Vibrating Sticks, Pedicure Devices, Eye Massagers, etc
- According to customer demand can be customized single output shaft, double output shaft vibration motor; Vibrating head type : Circular, Fan-shaped, etc

2. Motor Parameters



Category	Parameter	RS-775SM-1280-125T	RS-775SM-2480-125T
Voltage	Operating Range (V)	9.0 - 14.0	14.5 - 26.0
	Nominal (V)	12	24
No-Load	Speed (r/min)	8000	8000
	Current (A)	0.739	0.241
At Maximum Efficiency	Speed (r/min)	7005	6834
	Current (A)	4.42	1.824
	Torque (g.cm)	491.98	473.43
	Output (W)	36.79	32.97
At Maximum Power	Speed (r/min)	4323	4006
	Current (A)	12.85	6.78
	Torque (g.cm)	1717.31	2028.23
	Output (W)	74.939	79.956
Stall	Torque (g.cm)	3434.6	4056.5
	Current (A)	26.437	13.804

3. Conventional Custom Specifications

Voltage: DC 12~24V
Speed: 8000rpm

Head Type: Dual head , single head
Head Size: Customizable

4. Motor Only Torque Diagram

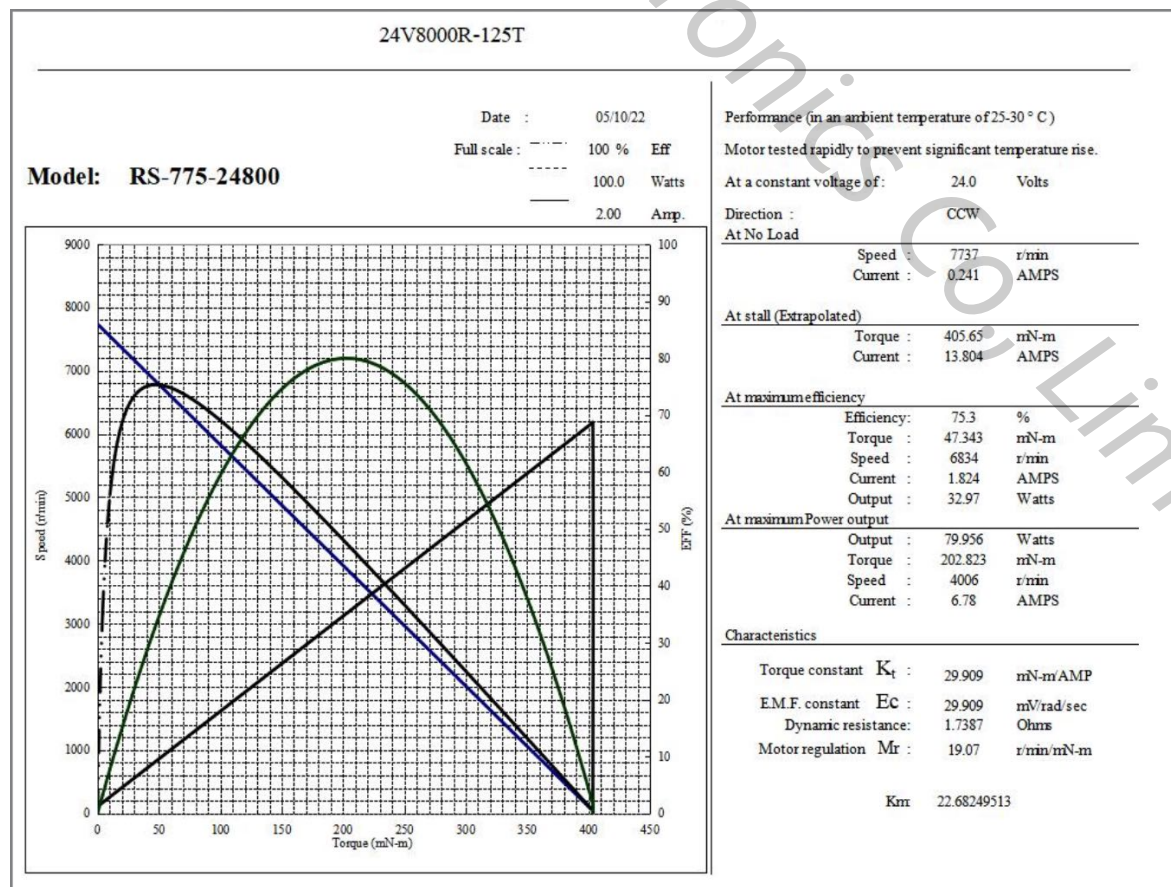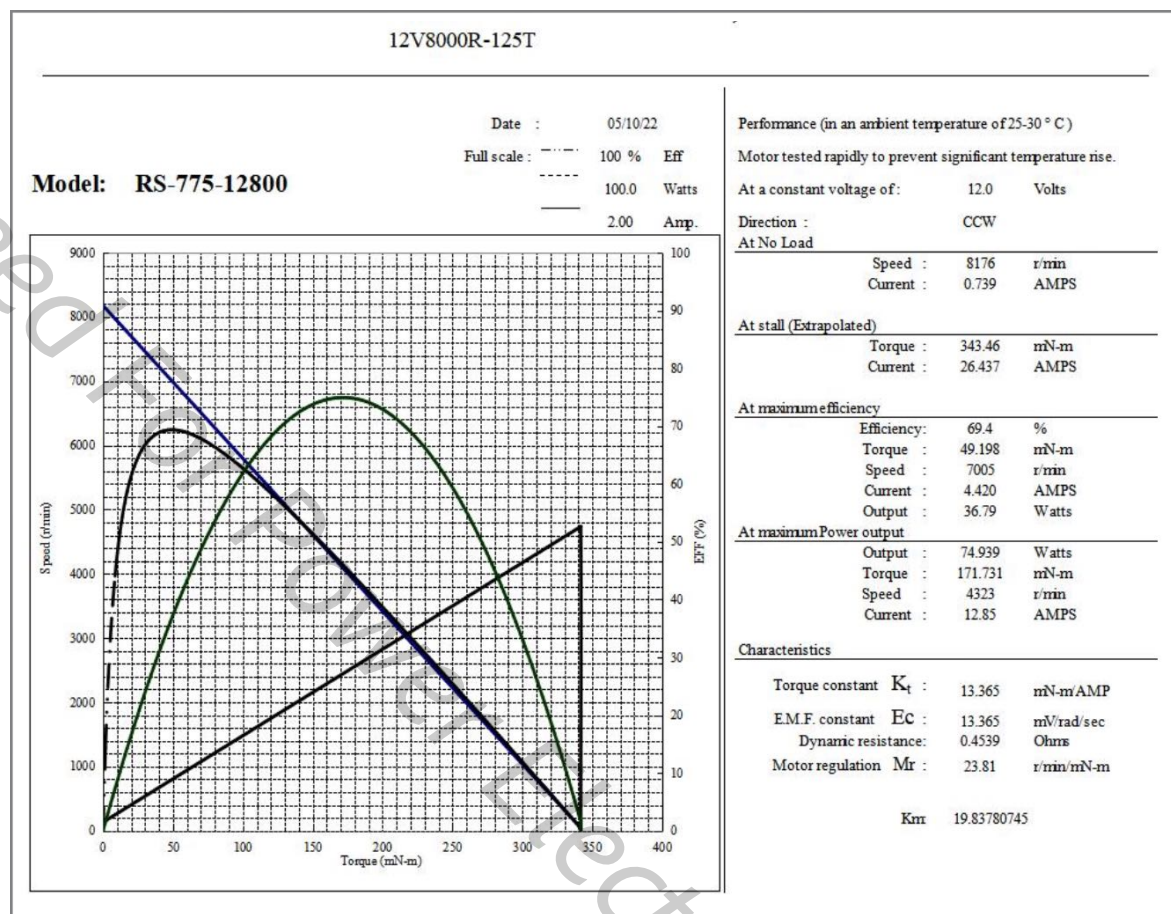

5. Outline Drawing

